


Wing Screws DIN 316

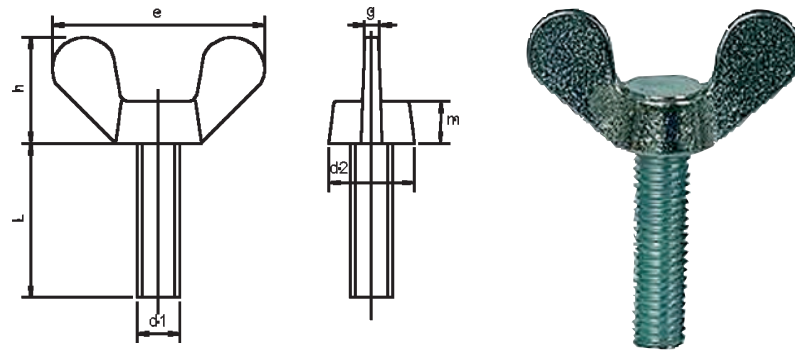

B

		DIMENSIONS						
HEAD	M	M4	M5	M6	M8	M10	M12	M16
	D	8,0	8,5	10,0	11,5	15,5	18,5	22,0
	e	20,0	25,0	31,5	37,0	49,5	63,5	71,5
	g	1,5	1,9	1,9	2,4	4,0	4,5	6,0
	h	9,5	12,0	16,0	19,0	24,0	32,3	36,3
	m	3,9	5,3	6,5	8,3	10,0	12,0	15,0
LENGTH	VE							
	8	200	200	200	-	-	-	-
	10	200	200	200	100	-	-	-
	12	200	200	100	100	-	-	-
	16	200	200	100	100	50	20	-
	20	200	200	100	100	50	20	-
	25	200	200	100	100	50	20	-
	30	200	100	100	100	50	20	10
	35	200	100	100	100	50	20	-
	40	100	100	100	50	50	20	10
	45	-	100	100	50	50	20	-
	50	-	100	100	50	20	20	10
	60	-	100	100	50	20	20	10
	70	-	-	100	50	20	20	-
80	-	-	100	50	20	20	-	

- ON REQUEST:** - special length, screws with fixed or unloseable washer
- thread end with cone point, with adaptor end or other special forms acc. to EIN ISO 4753
- PACKING (VE):** Commercial standard or after customer's request
- MATERIAL:** Head made of malleable cast iron EN-GJMB-350-10 acc. to DIN EN 1562, welded with steel threaded rod min. 4.6 self colour, zinc plated, nickel plated acc. to DIN EN ISO 4042, other surfaces on request
On request: stainless steel A2, A4, pickled, passivated
- TOLERANCE:** Metric thread 6 h / DIN 13-20
- DIMENSIONS:** The above mentioned dimensions are indicate only. They correspond to the average allowed during the production process.

