


## Cap Nuts DIN 1587

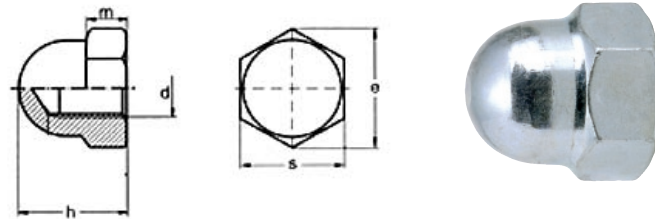

E

DIMENSIONS					
	e	h	M	s	VE
<b>M 3</b>	6,0 / 7,6	6 / 8	3,2	5,5 / 7	1000
<b>M 4</b>	7,6	8	3,2	7	1000
<b>M 5</b>	8,7	10	4,0	8	1000
<b>M 6</b>	11,0	12	5,0	10	1000
<b>M 8</b>	14,3	15	6,5	13	500
<b>M 10</b>	17,7	18	8,0	17	250
<b>M 12</b>	20,0	22	10,0	19	250
<b>M 14</b>	23,3	25	11,0	22	100
<b>M 16</b>	26,7	28	13,0	24	50
<b>M 18</b>	30,1	32	15,0	27	50
<b>M 20</b>	33,5	34	16,0	30	25
<b>M 24</b>	39,9	42	19,0	36	25

**PACKING (VE):** Commercial standard or after customer's request

**MATERIAL:** "One-piece-type" (pressed) steel self colour, zinc plated, nickel plated

Brass self colour, nickel plated, both acc. to DIN EN 4042, other surfaces on request; stainless steel A2, A4, pickled, passivated

"Two-piece-type" (with welded cap, similar acc. to DIN 1587): steel self colour, zinc plated, nickel plated acc. to

DIN EN ISO 4042, other surfaces on request

**TOLERANCE:** Metric thread 6 H acc. to DIN 13-20

**DIMENSION:** The above mentioned dimensions are indicate only. They correspond to the average allowed during the production process.

