



# CAP NUTS

## DIN 1587

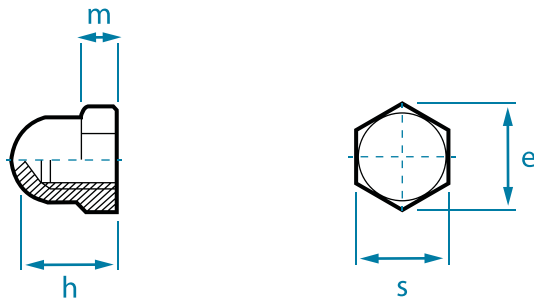

### DIMENSIONS

	e	h	m	s	
M 3*	6,0	6	3,2	5,5	1000
M 4	7,6	8	3,2	7	1000
M 5	8,7	10	4,0	8	1000
M 6	11,0	12	5,0	10	1000
M 8	14,3	15	6,5	13	500
M 10**	17,7	18	8,0	17	250
M 12**	20,0	22	10,0	19	250
M 14**	23,3	25	11,0	22	100
M 16	26,7	28	13,0	24	50
M 18	30,1	32	15,0	27	50
M 20	33,5	34	16,0	30	25
M 24	39,9	42	19,0	36	25

\* M 3 is not included in DIN 1587

\*\* Threads M10, M12 and M14 are delivered with customary spanner sizes.  
(According to standard the following apply for M10 key-width = 16, M12 key-width = 18 and M14 key-width = 21)

**PACKAGING:** Standard or according to customer specification

**MATERIAL:** Steel non-plated, zinc-plated, nickel-plated, brass non-plated, nickel-plated acc. to DIN EN ISO 4042, further finishes on request, stainless steel A2 or A4

**TOLERANCE:** Metric thread 6 H (untreated 6 G) acc. to DIN EN ISO 965-1

All of the dimensions stated above are approximate and may deviate both upwards and downwards.