


# BEAM CLAMPS

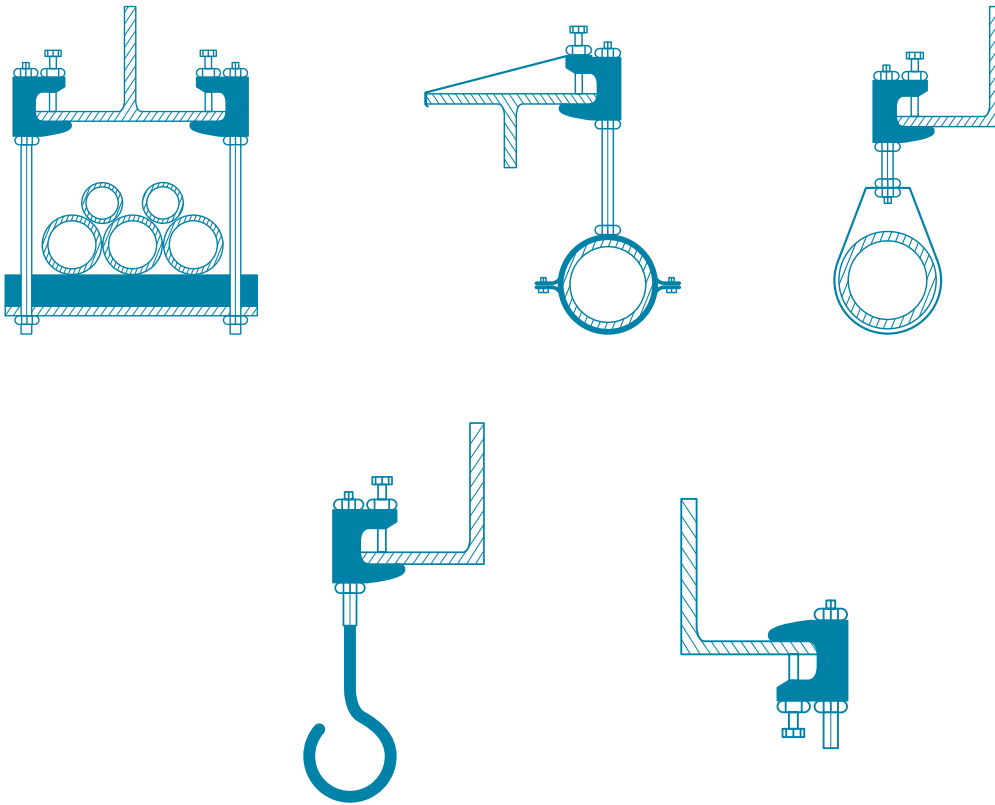


Our type TK and TKN beam clamps can be mounted with the tensile direction against the retaining screw or against the support. Please see our mounting instructions for further information.

## SECURING STRAPS

The use of securing straps for beam clamps is compulsory for > DN65 pipes under VDS regulations. All beam clamps can be secured with a securing strap against sideways slipping from the beam. Responsible authority regulations are to be observed.



Fits	Length (mm)	Breite (mm)	Dicke (mm)	Loch-ø (mm)	
TKN 8, TK 10, TKN 10, TK 12	350	25	3	10,5 / 12,5	12
TK 16	400	40	3	12,5 / 17,0	12

MATERIAL: Steel

SURFACE FINISH: galvanised as per DIN EN ISO 4042

All of the dimensions stated above are approximate and may deviate both upwards and downwards.